

# WDP and WCMP Wireless Data Gateway Adaptation

05-November-1999

## **Wireless Application Protocol WDP and WCMP Adaptation for access of a WAP Proxy Server to a Wireless Data Gateway**

© Wireless Application Protocol Forum Ltd. 1999. Terms and conditions of use are available from the Wireless Application Protocol Forum Ltd. Web site <http://www.wapforum.org/docs/copyright.htm>

***Disclaimer:***

*This document is subject to change without notice.*

---

*This Page Intentionally Left Blank*

---

## Table of Contents

<b>1</b>	<b>SCOPE .....</b>	<b>5</b>
<b>2</b>	<b>DOCUMENT STATUS .....</b>	<b>6</b>
2.1	COPYRIGHT NOTICE .....	6
2.2	ERRATA .....	6
2.3	COMMENTS .....	6
<b>3</b>	<b>REFERENCES .....</b>	<b>7</b>
3.1	NORMATIVE REFERENCES .....	7
<b>4</b>	<b>ABBREVIATIONS .....</b>	<b>8</b>
<b>5</b>	<b>TERMINOLOGY .....</b>	<b>9</b>
<b>6</b>	<b>GENERAL .....</b>	<b>10</b>
<b>7</b>	<b>SMPP ADAPTATION .....</b>	<b>11</b>
7.1	GENERAL WDP/WCMP ADAPTATION REQUIREMENTS .....	11
7.1.1	Underlying transport protocol .....	11
7.1.2	Support for More Messages to Send .....	11
7.1.3	Support for 'non Store-and-Forward' messages .....	11
7.1.4	Support for transferring binary data .....	11
7.1.5	Segmentation and Reassembly (SAR) .....	12
7.1.6	WCMP Support .....	13
7.1.7	Alert Notification .....	13
7.2	MANDATORY SMPP PDUS .....	14
7.2.1	DATA_SM .....	14
7.2.2	GENERIC_NACK .....	14
7.2.3	BIND .....	15
7.2.4	UNBIND .....	16
7.3	OPTIONAL SMPP PDUS .....	17
7.3.1	ENQUIRE_LINK .....	17
7.3.2	ALERT_NOTIFICATION .....	17
7.4	DETAILED PARAMETER VALUE RECOMMENDATIONS .....	18
7.4.1	BIND_TRANSCEIVER .....	18
7.4.2	BIND_TRANSMITTER .....	19
7.4.3	BIND_RECEIVER .....	20
7.4.4	UNBIND .....	20
7.4.5	ENQUIRE_LINK .....	21
7.4.6	DATA_SM (WAP Proxy Server initiated) .....	21
7.4.7	DATA_SM (Wireless Data Gateway initiated) .....	23
7.4.8	DATA_SM (Delivery Receipt from Wireless Data Gateway) .....	24
7.4.9	ALERT_NOTIFICATION .....	26
	<b>APPENDIX A. STATIC CONFORMANCE REQUIREMENT .....</b>	<b>27</b>
A.1	WAP proxy/server support .....	28
A.2	Wireless Data Gateway support .....	30
	<b>APPENDIX B. HISTORY AND CONTACT INFORMATION .....</b>	<b>32</b>



# 1 Scope

This document specifies the WDP and WCMP adaptation over the underlying access protocol between a WAP Proxy Server and a Wireless Data Gateway (such as an SMSC or a USSD server).

The tunnel protocol in the WAP architecture is based on a subset of the Short Message Peer-to-Peer Protocol (SMPP), version 3.4. SMPP includes support for the SMS bearer service (across the various network types) and the USSD bearer service (GSM network only).

This document details the elements of the SMPP protocol that are required and sufficient for carrying WDP and WCMP data units between a WAP Proxy Server and a Wireless Data Gateway. The Wireless Data Gateway is responsible for relaying the WDP and WCMP data units to and from the WAP capable wireless device (such as a mobile station).

Figure 1.1 shows a general model of the WAP protocol architecture and how SMPP fits into that architecture.

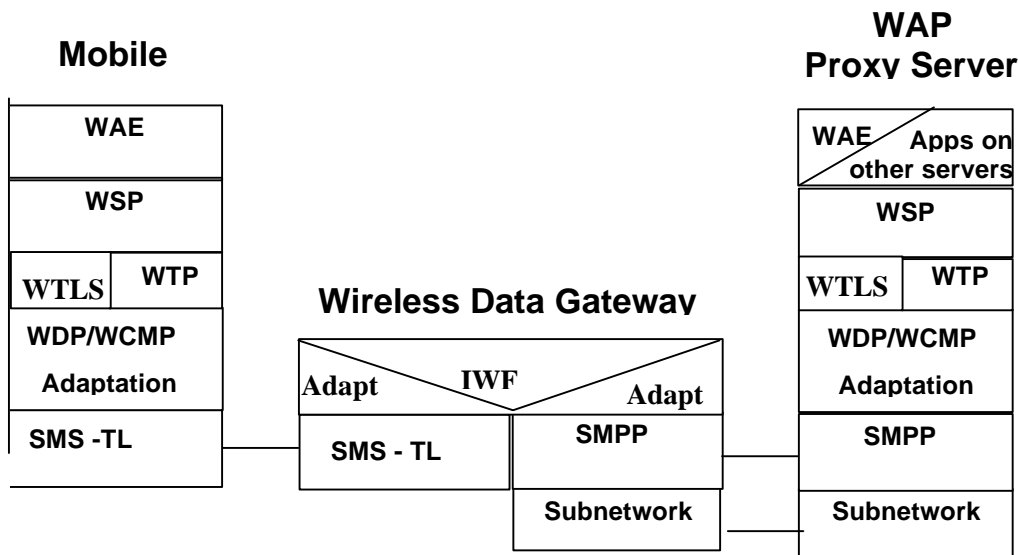


Figure 1.1 SMPP Tunnel in the WAP Architecture

---

## 2 Document Status

This document is available online in the following formats:

- PDF format at URL, <http://www.wapforum.org/>.

### 2.1 Copyright Notice

© Copyright Wireless Application Protocol Forum, Ltd, 1999.

Terms and conditions of use are available from the Wireless Application Protocol Forum Ltd. website at

<http://www.wapforum.org/docs/copyright.htm>.

### 2.2 Errata

Known problems associated with this document are published at <http://www.wapforum.org/>.

### 2.3 Comments

Comments regarding this document can be submitted to the WPG working group in the manner published at

<http://www.wapforum.org/>.

---

## 3 References

### 3.1 Normative references

- [SMPP34] Short Message Peer-to-Peer Protocol (SMPP) Specification. Version 3.4, Issue 1.2.  
<http://www.smpp.org>.
- [WAE] "Wireless Application Environment Specification", WAP Forum, 16 June 1999.  
<http://www.wapforum.org>
- [WAP] "Wireless Application Protocol Architecture Specification", WAP Forum, 30 April 1998.  
<http://www.wapforum.org>
- [WCMP] "Wireless Control Message Protocol Specification", WAP Forum, 14 May 1999.  
<http://www.wapforum.org>
- [WDP] "Wireless Datagram Protocol Specification", WAP Forum, 14 May 1999.  
<http://www.wapforum.org>
- [WTP] "Wireless Transaction Protocol Specification, WAP Forum, 11 June 1999.  
<http://www.wapforum.org>

---

## 4 Abbreviations

For the purposes of this specification the following abbreviations apply.

CDMA	Code Division Multiple Access
DPF	Delivery Pending Flag
ETSI	European Telecommunication Standardisation Institute
GSM	Global System for Mobile Communication
GPRS	General Packet Radio Service
iDEN	Integrated Digital Enhanced Network
IE	Information Element
IP	Internet Protocol
LSB	Least Significant Bits
MAP	Mobile Application Part
ME	Mobile Equipment
MSISDN	Mobile Subscriber ISDN (Telephone number or address of device)
MO	Mobile Originated
MS	Mobile Station
MT	Mobile Terminated
MMS	More Messages to Send
MSB	Most Significant Bit
PDU	Protocol Data Unit
SAR	Segmentation and Reassembly
SME	Short Message Entity
SME-IF	Short Message Entity Interface
SMPP	Short Message Peer-to-Peer
SMSC	Short Message Service Centre
SMS	Short Message Service
TCP/IP	Transmission Control Protocol/Internet Protocol
TDMA	Time Division Multiple Access
UDH	User-Data Header (see GSM 03.40)
UDHI	User-Data Header Indication (see GSM 03.40)
UDP	User Datagram Protocol
USSD	Unstructured Supplementary Service Data
WAE	Wireless Application Environment
WAP	Wireless Application Protocol
WCMP	Wireless Control Message Protocol
WDP	Wireless Datagram Protocol
WSP	Wireless Session Protocol
WTP	Wireless Transaction Protocol



---

## 5 Terminology

This specification uses the following words for defining the significance of each particular requirement:

### MUST

This word, or the terms "REQUIRED" or "SHALL", mean that the definition is an absolute requirement of the specification.

### MUST NOT

This phrase, or the phrase "SHALL NOT", mean that the definition is an absolute prohibition of the specification.

### SHOULD

This word, or the adjective "RECOMMENDED", mean that there may exist valid reasons in particular circumstances to ignore a particular item, but the full implications must be understood and carefully weighed before choosing a different course.

### SHOULD NOT

This phrase, or the phrase "NOT RECOMMENDED" mean that there may exist valid reasons in particular circumstances when the particular behaviour is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behaviour described with this label.

### MAY

This word, or the adjective "OPTIONAL", mean that an item is truly optional. One vendor may choose to include the item because a particular marketplace requires it or because the vendor feels that it enhances the product while another vendor may omit the same item. An implementation which does not include a particular option MUST be prepared to interoperate with another implementation which does include the option, though perhaps with reduced functionality. In the same vein an implementation which does include a particular option MUST be prepared to interoperate with another implementation which does not include the option (except, of course, for the feature the option provides.)

---

## 6 General

The protocol between a WAP Proxy Server and a Wireless Data Gateway is required to be “wireless network technology independent”. This assures a true isolation from the network type and device type used. It also assures the end-to-end nature of the Wireless Data Protocol (WDP) and Wireless Control Message Protocol (WCMP) that are “tunnelled” between the WAP Proxy Server and the Mobile Station.

This document defines in an unambiguous manner how SMPP shall be implemented for a proper interworking in this context.

The following sections describe the protocol elements to be used, specific values of parameters to be used and recommends optional features.

#### 7.1.4 Support for transferring binary data

WDP and WCOMP messages are encoded in binary format. The adaptation layers in the Wireless Data Gateway and WAP Proxy Server **MUST** set the SMPP *data\_coding* parameter to “8-bit binary” (0x04).

Some WAP Proxy Servers may encode WDP datagrams in textual format. In this case, the WAP Proxy Server **MAY** set the SMPP *data\_coding* parameter to another character coding set scheme (e.g. IA5/ASCII).

## 7.1.5 Segmentation and Reassembly (SAR)

The WDP Tunnel Requirements allows various options for the Segmentation and Reassembly of WDP datagrams.

### 1. The WAP Proxy Server is performing Segmentation and Reassembly

When sending a WDP datagram to the wireless device, the WAP Proxy Server segments the WDP datagram prior to tunnelling it over the SMPP connection to the Wireless Data Gateway. Each of the segments is transmitted in a separate *data\_sm* PDU to the Wireless Data Gateway. In this case, the WAP Proxy Server MUST include the *sar\_msg\_ref\_num*, *sar\_total\_segments* and the *sar\_segment\_seqnum* parameters in the *data\_sm* PDU.

When a WAP Proxy Server is receiving a WDP datagram from the wireless device, it can receive it in the form of a number of segments. Each segment is sent by the Wireless Data Gateway as message payload in separate *data\_sm* PDUs. In this case, the Wireless Data Gateway MUST include the *sar\_msg\_ref\_num*, *sar\_total\_segments* and the *sar\_segment\_seqnum* parameters in the *data\_sm* PDU. The WAP Proxy Server reassembles the complete WDP datagram once it has received all segments.

### 2. The Wireless Data Gateway implements a Segmentation and Reassembly function for WDP Datagrams.

When sending a WDP datagram to the wireless device, the WAP Proxy Server sends a complete datagram in a single *data\_sm* PDU to the Wireless Data Gateway. In this case, the WAP Proxy Server MUST not include the *sar\_msg\_ref\_num*, *sar\_total\_segments* and the *sar\_segment\_seqnum* parameters in the *data\_sm* PDU.

When a WAP Proxy Server is receiving a WDP datagram from the wireless device, it will receive it as a complete datagram from the Wireless Data Gateway. In this case, the Wireless Data Gateway MUST not include the *sar\_msg\_ref\_num*, *sar\_total\_segments* and the *sar\_segment\_seqnum* parameters in the *data\_sm* PDU.

### 3. Dual Segmentation and Reassembly

This is a special case of SAR where both the WAP Proxy Server and the Wireless Data Gateway perform the Segmentation and Reassembly of a WDP datagram. In this scenario, the WAP Proxy Server transmits the WDP datagram as a sequence of segments over the SMPP tunnel to the Wireless Data Gateway. As an implementation option, the Wireless Data Gateway then reassembles the segments back into one complete WDP datagram, before it forwards the WDP datagram over the wireless interface. Depending on the technology of the wireless device, the Wireless Data Gateway may have to re-segment the datagram for transmission over the wireless interface.

Similarly, the Wireless Data Gateway may reassemble a WDP datagram received as a series of segments over the wireless interface and then re-segment the WDP datagram for delivery over the SMPP tunnel to the WAP Proxy Server.

The adaptation for the transmission of the WDP datagram segments over the SMPP tunnel is exactly the same as option 1 above for both directions of WDP datagram flow. In essence, the Dual Segmentation and Reassembly is an implementation option for the Wireless Data Gateway and no extra special adaptation is required.

## 7.1.6 WCMP Support

When sending a WCMP message to the MS, the WAP Proxy Server MUST indicate this to the Wireless Data Gateway by setting the *payload\_type* parameter in *data\_sm* to “WCMP” (0x01). The WCMP message is carried in the *message\_payload* parameter. On receiving a *data\_sm* with *payload\_type* set to “WCMP”, the Wireless Data Gateway will transmit the WCMP messages to the wireless device using the network dependent mechanism as defined in [WCMP].

The Wireless Data Gateway can also relay a WCMP message from the wireless device to the WAP Proxy Server. In this case, the Wireless Data Gateway MUST set the *payload\_type* parameter in *data\_sm* to “WCMP” (0x01). The WCMP message is carried in the *message\_payload* parameter.

## 7.1.7 Alert Notification

A WAP Proxy Server can request that the Wireless Data Gateway set a Delivery Pending Flag (DPF) for the delivery failure of a WDP datagram over the wireless interface. The exact delivery failure conditions are technology dependent (e.g. GSM allows a DPF to be set for “memory capacity exceeded”) and Wireless Data Gateway implementation specific. However, in general the failure condition can be characterised as being a “device unavailable” failure.

SMPP allows the WAP proxy server to request this setting on a per-datagram basis using the *set\_dpf* parameter in the *data\_sm* PDU.

The Wireless Data Gateway SHOULD then send an alert notification to the WAP Proxy Server when it or the wireless network infrastructure (e.g. HLR) detects that device has become available. It should be noted that the Wireless Data Gateway only sends this alert when the DPF setting for the wireless device had been requested in a previous *data\_sm* operation.

The *alert\_notification* PDU is used to send the alert to the WAP Proxy Server.

## 7.2 Mandatory SMPP PDUs

This section documents the SMPP PDUs that are mandatory for WDP/WCMP data tunnelling between a WAP Proxy Server and a Wireless Data Gateway.

### 7.2.1 DATA\_SM

The *data\_sm* PDU is used to carry WDP and WCMP datagrams. The type of payload is indicated via the *payload\_type* parameter. Both the Wireless Data Gateway and the WAP Proxy Server MUST be capable of sending the *data\_sm* PDU.

A WAP Proxy Server MAY select a delivery mode when tunnelling datagrams to the Wireless Data Gateway. The delivery mode indicates to the Wireless Data Gateway the mechanism to be used for delivering the datagram to the wireless device. The delivery mode is indicated in the *esm\_class* parameter (message mode settings). The delivery modes available in *data\_sm* for WAP datagrams are as follows:

1. Store and Forward  
This mode allows the WAP Proxy Server to request the Wireless Data Gateway to securely store the datagram until it is delivered or until it expires. This mode may be used for “push” applications. The WAP Proxy Server can control the expiration time by specifying the *qos\_time\_to\_live* parameter in the *data\_sm* PDU.
2. Datagram  
This mode allows the WAP Proxy Server to request the Wireless Data Gateway to relay the datagram to the MS, without necessarily securing the datagram for long-term storage. This mode is designed for “interactive applications”. The WAP Proxy Server can control the lifetime of the datagram in the Wireless Data Gateway by specifying the *qos\_time\_to\_live* parameter in the *data\_sm* PDU.

The *data\_sm* PDU also supports the various options for location of the Segmentation and Reassembly function in the WAP network. See section 7.1.5.

Section 7.4.7 details the individual parameter settings for the *data\_sm* PDU for both the “mobile terminated” and “mobile originated” directions.

### 7.2.2 GENERIC\_NACK

The GENERIC\_NACK PDU is sent by the Wireless Data Gateway or the WAP Proxy Server to indicate the following SMPP protocol error conditions encountered when processing an SMPP request PDU.

- Invalid *command\_length*. The length of the SMPP request PDU is not correct.
- Unknown *command\_id*. The SMPP request PDU is either unknown or not supported.
- Corrupted SMPP PDU. The SMPP request PDU is detected to be corrupt.

### 7.2.3 BIND

The WAP Proxy Server must establish an SMPP session with a Wireless Data Gateway prior to the transmission of WDP/WCMP messages over the link. There are two mechanisms for setting up SMPP sessions. Only one mechanism MUST be supported.

The first mechanism allows the WAP Proxy Server to issue both a *bind\_transmitter* PDU and/or a *bind\_receiver* PDU to set up distinct SMPP sessions for the different directions of WDP message flow.

The second mechanism allows a WAP Proxy Server to set up a single SMPP session for two-way WDP datagram flow using the *bind\_transceiver* PDU.

#### 7.2.3.1 BIND\_TRANSCEIVER

The *bind\_transceiver* PDU is used to establish a duplex messaging session between a WAP Proxy Server and a Wireless Data Gateway. The WAP Proxy Server can send datagrams to a wireless device (e.g. MS) and should be able to receive datagrams from a wireless device over a transceiver session.

The WAP Proxy Server provides identification and authentication information as part of the session establishment. See 7.4.1 for more details.

As an option, Wireless Data Gateways MAY allow trusted WAP Proxy Servers to establish an SMPP session without providing a password.

#### 7.2.3.2 BIND\_TRANSMITTER

The *bind\_transmitter* PDU is used to establish a one way messaging session between a WAP Proxy Server and a Wireless Data Gateway. The WAP Proxy Server can only send datagrams to a wireless device (e.g. MS) over a transmitter session.

The WAP Proxy Server provides identification and authentication information as part of the session establishment. See 7.4.2 for more details.

As an option, Wireless Data Gateways MAY allow trusted WAP Proxy Servers to establish an SMPP session without providing a password.

#### 7.2.3.3 BIND\_RECEIVER

The *bind\_receiver* PDU is used to establish a one-way messaging session between a WAP Proxy Server and a Wireless Data Gateway. The WAP Proxy Server will only receive datagrams originated from a wireless device (e.g. MS) over an SMPP receiver session.

The WAP Proxy Server provides identification and authentication information as part of the session establishment. See 7.4.3 for more details.

As an option, Wireless Data Gateways MAY allow trusted WAP Proxy Servers to establish an SMPP session without providing a password.

## 7.2.4 UNBIND

The UNBIND PDU is used by either the WAP Proxy Server or the Wireless Data Gateway to terminate the SMPP session. Thereafter the node should disconnect the link at TCP level.



## 7.3 Optional SMPP PDUs

This section documents the SMPP PDUs that are implementation options for WDP/WCMP data tunnelling between a WAP Proxy Server and a Wireless Data Gateway.

### 7.3.1 ENQUIRE\_LINK

This PDU can be used by both the WAP Proxy Server and the Wireless Data Gateway to test the peer to peer communications and sanity level of an SMPP link. When implemented, the node sending the *enquire\_link* PDU should note the following:

- The *enquire\_link* PDU need only be sent after a certain idle (i.e. inactivity) period has been detected on the link. This period is defined using the SMPP *enquire\_link\_timer*.
- If a response is not received within a certain time period (defined by the SMPP *response\_timer*), the node should disconnect the link at TCP/IP level.

### 7.3.2 ALERT\_NOTIFICATION

This PDU is used by the Wireless Data Gateway to send an alert notification to the WAP Proxy Server. A Wireless Data Gateway sends an alert notification when it detects that a wireless device has become available and for which a DPF setting had been previously requested (by the WAP Proxy Server) in a failed datagram delivery to that wireless device.

The *alert\_notification* PDU contains the address of the wireless device and the originating WDP entity address in the datagram which requested the DPF setting.

## 7.4 Detailed Parameter Value Recommendations

This section provides the recommended parameter values for the subset of the SMPP PDUs that are required for WDP and WCMP data tunnelling. Only those SMPP parameters that are mandatory or optional for WAP application are documented in this section.

**Note:-** This section of the document defines those specific elements of SMPP Protocol Specification v3.4 which are required for WAP applications. This section does not document generic SMPP details such as the SMPP header format. The reader should refer to the SMPP specification [SMPP34] for this generic information.

### 7.4.1 BIND\_TRANSCEIVER

The *bind\_transceiver* operation is used by a WAP Proxy Server to establish a duplex messaging session to a Wireless Data Gateway. The following tables provide the recommended parameter settings for the request and response PDUs.

#### 7.4.1.1 BIND\_TRANSCEIVER Request

Parameter	M/O	Size (bytes)	Recommended Value	Comment
system_id	M	1 - 15	identification string	Identifies the WAP Proxy Server
password	M	1 - 9	any character string	Trusted WAP Proxy Servers that do not need to send a password can set this parameter to NULL.
system_type	M	1 - 12	"WAP"	Indicates that the connecting system is a WAP Proxy Server.
interface_version	M	1	0x34	Identifies the version of the SMPP protocol supported by the ESME.
addr_ton	M	1	Any	TON for WAP Proxy Server address
addr_npi	M	1	Any.	NPI for WAP Proxy Server address
address_range	M	1 - 40	WAP Proxy Server address digits	A single address which identifies the WAP Proxy Server. This could be for example an IP address or a short code telephone number assigned to the WAP Proxy Server by the service provider.

#### 7.4.1.2 BIND\_TRANSCEIVER Response

Parameter	M/O	Size (bytes)	Recommended Value	Comment
system_id	M	1 - 15	identification string	Identifies the Wireless Data Gateway
sc_interface_version	M	1	0x34	Wireless Data Gateways should

				set the SMPP protocol version to v3.4.
--	--	--	--	--

## 7.4.2 BIND\_TRANSMITTER

The *bind\_transmitter* operation is used by a WAP Proxy Server to establish a one way messaging session to a Wireless Data Gateway. The following tables provide the recommended parameter settings for the request and response PDUs.

### 7.4.2.1 BIND\_TRANSMITTER Request

Parameter	M/O	Size (bytes)	Recommended Value	Comment
system_id	M	1 - 15	identification string	Identifies the WAP Proxy Server
password	M	1 - 9	password character string	Trusted WAP Proxy Servers that do not need to send a password can set this parameter to NULL.
system_type	M	1 - 12	"WAP"	Indicates that the connecting system is a WAP Proxy Server.
interface_version	M	1	0x34	Identifies the version of the SMPP protocol supported by the ESME.
addr_ton	M	1	Any	TON for WAP Proxy Server address
addr_npi	M	1	Any.	NPI for WAP Proxy Server address
address_range	M	1 - 40	WAP Proxy Server address digits	A single address which identifies the WAP Proxy Server. This could be for example an IP address or a short code telephone number assigned to the WAP Proxy Server by the service provider.

### 7.4.2.2 BIND\_TRANSMITTER Response

Parameter	M/O	Size (bytes)	Recommended Value	Comment
system_id	M	1 - 15	identification string	Identifies the Wireless Data Gateway
sc_interface_version	M	1	0x34	Wireless Data Gateways MUST set the SMPP protocol version to v3.4.

### 7.4.3 BIND\_RECEIVER

The *bind\_receiver* operation establishes a one way messaging session to a Wireless Data Gateway for receiving WDP and WCMP datagrams originated by wireless devices. The following tables provide the recommended parameter settings for the request and response PDUs.

#### 7.4.3.1 BIND\_RECEIVER Request

Parameter	M/O	Size (bytes)	Recommended Value	Comment
system_id	M	1 - 15	identification string	Identifies the WAP Proxy Server
password	M	1 - 9	password character string	Trusted WAP Proxy Servers that do not need to send a password can set this parameter to NULL.
system_type	M	1 - 12	"WAP"	Indicates that the connecting system is a WAP Proxy Server.
interface_version	M	1	0x34	Identifies the version of the SMPP protocol supported by the ESME.
addr_ton	M	1	Any	TON for WAP Proxy Server address
addr_npi	M	1	Any.	NPI for WAP Proxy Server address
address_range	M	1 - 40	WAP Proxy Server address digits	A single address which identifies the WAP Proxy Server. This could be for example an IP address or a short code telephone number assigned to the WAP Proxy Server by the service provider.

#### 7.4.3.2 BIND\_RECEIVER Response

Parameter	M/O	Size (bytes)	Recommended Value	Comment
system_id	M	1 - 15	identification string	Identifies the Wireless Data Gateway
sc_interface_version	M	1	0x34	Wireless Data Gateways MUST set the SMPP protocol version to v3.4.

### 7.4.4 UNBIND

The *unbind* operation clears down an SMPP session between a WAP Proxy Server and a Wireless Data Gateway.

Both the *unbind* and *unbind\_resp* PDUs only contain an SMPP header part.

## 7.4.5 ENQUIRE\_LINK

The *enquire\_link* operation is used by a WAP Proxy Server and a Wireless Data Gateway to test the peer to peer communications and sanity level of an SMPP session.

Both the *enquire\_link* and *enquire\_link\_resp* PDUs only contain an SMPP header part.

## 7.4.6 DATA\_SM (WAP Proxy Server initiated)

A WAP Proxy Server uses the *data\_sm* PDU to send a WDP or a WCMP message to a Wireless Data Gateway. The Wireless Data Gateway should return a *data\_sm\_resp* PDU once it has accepted the message.

### 7.4.6.1 DATA\_SM (WAP Proxy Server -> Wireless Data Gateway)

The following table provides the recommended values to be used by a WAP Proxy Server when sending a *data\_sm*.

Parameter	M/O	Size (bytes)	Recommended Value	Comment
service_type	M	5	“WAP”	Indicates SMS application service is WAP
source_addr_ton	M	1	0x00 (Unknown)	International directory number
source_addr_npi	M	1	0x00 (Unknown) 0x01 (E.164) 0x0E (IP)	WAP Proxy Server can indicate the associated numbering plan of its own address.
source_addr	M	0 – 64	Address digits	address digits of WAP Proxy Server
dest_addr_ton	M	1	0x01	International directory number
dest_addr_npi	M	1	0x01	E164 numbering plan
dest_addr	M	1 – 64	Directory number digits	This is the MSISDN of the MS
esm_class	M	1	0x00 0x01	Store and Forward mode Datagram mode
registered_delivery	M	1	0x00 0x01	No SMSC receipt requested SMSC Delivery Receipt requested
data_coding	M	1	0x04 0x00 – 0x0F	8-bit binary other character sets.
source_port	M	2	0 – 65535	UDP port of originating WDP entity
dest_port	M	2	0 – 65535	UDP port of destination WDP entity
sar_msg_ref_num	O	2	0 – 65535	MUST be present if WAP Proxy Server is segmenting the WDP message.
sar_total_segments	O	1	2 – 255	MUST be present if WAP Proxy Server is segmenting the WDP message
sar_segment_seqnum	O	1	1 – 255	MUST be present if WAP Proxy

				Server is segmenting the WDP message
more_msgs_to_send	O	1	0x01	SHOULD be present if WAP Proxy Server has further WDP (segments) to send.
dest_addr_subunit	O	1	0x00 (unknown) 0x02 (ME)	WAP Proxy Server MAY include this parameter to direct the WDP/WCMP within the MS
dest_network_type	O	1	Any	WAP Proxy Server MAY include this parameter to direct the WDP/WCMP to a particular wireless network type
dest_bearer_type	O	1	Any	WAP Proxy Server MAY include this parameter to request the Wireless Data Gateway to select a particular bearer for the WDP/WCMP.
qos_time_to_live	O	4	Any	MAY be used to request the period of time that the Wireless Data Gateway should retain the WDP message if it fails to get delivered
payload_type	O	1	0x00 (WDP) 0x01 (WCMP)	This parameter MUST be present and set to 0x01 for a WCMP message
message_payload	M	1 – 65535	user data	WDP or WCMP content
set_dpf	O	1	0x00 or 0x01	Do not set DPF Setting of DPF requested.

#### 7.4.6.2 DATA\_SM\_Resp (Wireless Data Gateway -> WAP Proxy Server)

The following table provides the recommended values to be used by a Wireless Data Gateway when returning a *data\_sm\_resp*.

Parameter	M/O	Size (bytes)	Recommended Value	Comment
message_id	M	1 – 64	Any	The message ID is the Wireless Data Gateway's handle to the datagram. It should be considered as an opaque value.
additional_status_info_text	O	1 – 255	Textual string	A Wireless Data Gateway may include a diagnostic text string for failure scenarios

## 7.4.7 DATA\_SM (Wireless Data Gateway initiated)

A Wireless Data Gateway uses the *data\_sm* operation to send a WDP or a WCMP message to a WAP Proxy Server.

### 7.4.7.1 DATA\_SM (Wireless Data Gateway -> WAP Proxy Server)

The following table provides the recommended values to be used by a Wireless Data Gateway when sending a *data\_sm*.

Parameter	M/O	Size (bytes)	Recommended Value	Comment
service_type	M	5	“WAP”	Indicates SMS application service is WAP
source_addr_ton	M	1	0x01 (Int.)	International directory number
source_addr_npi	M	1	0x01 (E.164)	all MS's have E.164 directory numbers
source_addr	M	0 – 64	address digits	directory number digits of wireless device
dest_addr_ton	M	1	0x00 (unknown)	International directory number
dest_addr_npi	M	1	0x00 (unknown) 0x01 (E.164 ) 0x0E (IP)	WAP Proxy Server can either be addressed via an IP address or a telephone number address. Otherwise set to “unknown”
dest_addr	M	1 – 64	address digits	Address digits of WAP Proxy Server
esm_class	M	1	0x00	no special message mode
registered_delivery	M	1	0x00	no acknowledgements/receipts
data_coding	M	1	0x04 0x00 – 0x0F	8-bit binary Other character sets.
source_port	M	2	0 – 65535	UDP port of originating WDP entity
dest_port	M	2	0 – 65535	UDP port of destination WDP entity
sar_msg_ref_num	O	2	0 – 65535	MUST be present if WAP Proxy Server is reassembling the WDP message.
sar_total_segments	O	1	2 – 255	MUST be present if WAP Proxy Server is reassembling the WDP message
sar_segment_seqnum	O	1	1 – 255	MUST be present if WAP Proxy Server is reassembling the WDP message
source_network_type	O	1	Any	Wireless Data Gateway MAY include this parameter to indicate the type of wireless interface over which the datagram was received.
source_bearer_type	O	1	Any	Wireless Data Gateway MAY include this parameter to indicate

				the type of wireless bearer over which the datagram was received.
payload_type	O	1	0x00 (WDP) 0x01 (WCMP)	This parameter MUST be present and set to 0x01 for a WCMP message.
message_payload	M	1 – 65535	user data	WDP or WCMP content

#### 7.4.7.2 DATA\_SM\_Resp (WAP Proxy Server -> Wireless Data Gateway)

The following table provides the recommended values to be used by a WAP Proxy Server when returning a *data\_sm\_resp*.

Parameter	M/O	Size (bytes)	Recommended Value	Comment
message_id	M	1 – 64	0x00 (NULL)	The Wireless Data Gateway does not need a handle to the WDP or WCMP datagram.
additional_status_info_text	O	1 – 255	Textual string	A WAP Proxy Server may include a diagnostic text string for failure scenarios

#### 7.4.8 DATA\_SM (Delivery Receipt from Wireless Data Gateway)

A Wireless Data Gateway uses the *data\_sm* operation to send a final delivery receipt to the WAP Proxy Server.

##### 7.4.8.1 DATA\_SM (Wireless Data Gateway -> WAP Proxy Server)

The following table provides the recommended values to be used by a Wireless Data Gateway when sending a Delivery Receipt

Parameter	M/O	Size (bytes)	Recommended Value	Comment
service_type	M	5	“WAP”	Indicates SMS application service is WAP
source_addr_ton	M	1	0x01 (Int.)	
source_addr_npi	M	1	0x01 (E.164)	all MS's have E.164 directory numbers
source_addr	M	0 – 64	address digits	directory number digits of wireless device to which the receipt pertains
dest_addr_ton	M	1	0x00 (unknown)	
dest_addr_npi	M	1	0x00 (unknown) 0x01 (E.164) 0x0E (IP)	WAP Proxy Server can either be addressed via an IP address or a telephone number address. Otherwise set to “unknown”
dest_addr	M	1 – 64	address digits	Address digits of WAP Proxy Server



esm_class	M	1	0x04	indicates that <i>data_sm</i> contains a delivery receipt
registered_delivery	M	1	0x00	no acknowledgements
data_coding	M	1	0x00 (default) 0x01 (ASCII)	Should be set to 0x01 when providing an ASCII text string (in the message payload) that further describes the delivery receipt. Otherwise set to 0x00 if a text string is not included in the message payload.
received_message_id	M	1 – 64	Any	The Wireless Data Gateway's handle to the original WDP message. See 7.4.6.2
message_state	M	1	Any	Indicates state of the WDP message being received.
network_error_code	O	3	network specific error code	MAY be included by the Wireless Data Gateway to provide further information for a WDP, which failed due to a wireless network error.
message_payload	O	1 – 255	text string	Descriptive textual string for delivery receipt. MAY be included for informational purposes.

#### 7.4.8.2 DATA\_SM Response PDU

The following table provides the recommended values to be used by a WAP Proxy Server when returning a *data\_sm* response for a Delivery Receipt.

Parameter	M/O	Size (bytes)	Recommended Value	Comment
message_id	M	1 – 64	0x00 (NULL)	No handle required for a Delivery Receipt.

## 7.4.9 ALERT\_NOTIFICATION

A Wireless Data Gateway uses the *alert\_notification* operation to send an alert to the WAP Proxy Server indicating that the wireless device has become available.

### 7.4.9.1 ALERT\_NOTIFICATION PDU

The following table provides the recommended values to be used by a Wireless Data Gateway when sending an alert.

<u>Parameter</u>	<u>M/O</u>	<u>Size (bytes)</u>	<u>Recommended Value</u>	<u>Comment</u>
source_addr_ton	M	1	0x01 (Int.)	
source_addr_npi	M	1	0x01 (E.164)	all MS's have E.164 directory numbers
source_addr	M	0 – 64	address digits	directory number digits of wireless device that has become available
esme_addr_ton	M	1	any	TON for the source address in the original datagram ( <i>data_sm</i> )
esme_addr_npi	M	1	any	TON for the source address in the original datagram ( <i>data_sm</i> ).
esme_addr	M	1 – 64	address digits	Address digits of WAP Proxy Server
ms_availability_status	O	1	0x00 (available)	The availability status of the wireless device

---

## Appendix A. Static Conformance Requirement

This static conformance clause defines a minimum set of features that can be implemented to ensure that the implementation will be able to inter-operate. This static conformance clause applies to the use of SMPP for WAP only. A feature can be optional or mandatory. If a SMPP implementation does not support an optional feature, transmission should occur without error.

## A.1 WAP proxy/server support

Identifier	Function	PDU / Capability	Reference	Mandatory/Optional
SMPP_PS_001	Datagram transmission (binary encoded)	<i>data_sm</i> , <i>data_sm_resp</i> and <i>generic_nack</i> PDUs	7.2.1, 7.2.2 7.4.6	M
SMPP_PS_002	Datagram reception (binary encoded)	<i>data_sm</i> , <i>data_sm_resp</i> and <i>generic_nack</i> PDUs	7.2.1, 7.2.2, 7.4.7	M
SMPP_PS_003	WCMP transmission	<i>payload_type</i> parameter in <i>data_sm</i> PDU	7.1.6, 7.4.6.1	O
SMPP_PS_004	WCMP reception	<i>payload_type</i> parameter in <i>data_sm</i> PDU	7.1.6, 7.4.7.1	O
SMPP_PS_005	Bind Transceiver	<i>bind_transceiver</i> , <i>bind_transceiver_resp</i> PDUs	7.2.3.1, 7.4.1	M (note 1)
SMPP_PS_006	Bind Transmitter & Bind Receiver	<i>bind_transmitter</i> , <i>bind_transmitter_resp</i> , <i>bind_receiver</i> , <i>bind_receiver_resp</i> PDUs	0, 7.2.3.3, 7.4.2, 7.4.3	M (note 1)
SMPP_PS_007	Unbind	<i>unbind</i> and <i>unbind_resp</i> PDUs	7.2.4	M
SMPP_PS_008	Enquire Link	<i>enquire_link</i> and <i>enquire_link_resp</i> PDUs	7.3.1	O
SMPP_PS_009	Text based encoding of WDP and WCMP messages	<i>data_coding</i> parameter in <i>data_sm</i>	7.1.4 7.4.6.1, 7.4.7.1	O
SMPP_PS_010	More messages to send	<i>more_msgs_to_send</i> parameter in <i>data_sm</i>	7.1.2, 7.4.6.1	O
SMPP_PS_011	Request Store and forward mode	<i>esm_class</i> parameter in <i>data_sm</i>	7.2.1, 7.4.6.1	O
SMPP_PS_012	Request datagram mode	<i>esm_class</i> parameter in <i>data_sm</i>	7.2.1, 7.4.6.1	M
SMPP_PS_013	Segmentation and re- assembly	SAR parameters in <i>data_sm</i>	7.1.5, 7.4.6.1, 7.4.7.1	O
SMPP_PS_014	Request SMSC Delivery Report	<i>registered_delivery</i> parameter in <i>data_sm</i>	7.4.6.1	O
SMPP_PS_015	Receive SMSC Delivery Report	<i>esm_class</i> , <i>receipted_message_id</i> and <i>message_state</i> parameters in <i>data_sm</i>	7.4.8	O
SMPP_PS_016	specification of network type for peer wireless device	<i>dest_network_type</i> , <i>source_network_type</i> parameters in <i>data_sm</i>	7.4.6.1, 7.4.7.1	O

Identifier	Function	PDU / Capability	Reference	Mandatory/ Optional
SMPP_PS_017	specification of bearer type for peer wireless device	<i>dest_bearer_type</i> , <i>source_bearer_type</i> parameters in <i>data_sm</i>	7.4.6.1, 7.4.7.1	O
SMPP_PS_018	specification of validity period on a per message basis	<i>qos_time_to_live</i> parameter in <i>data_sm</i>	7.4.6.1	O
SMPP_PS_019	DPF request and processing of Alert Notifications	<i>alert_notification</i> PDU and <i>set_dpf</i> parameter in <i>data_sm</i> PDU	7.1.7, 7.3.2, 7.4.6.1, 7.4.9	O

### Notes

1. Only one of these Functional Units need be implemented (see section 7.2.3).

## A.2 Wireless Data Gateway support

Identifier	Function	PDU / Capability	Reference	Mandatory/ Optional
SMPP_DG_001	Datagram transmission (binary encoded)	<i>data_sm</i> , <i>data_sm_resp</i> and <i>generic_nack</i> PDUs	7.2.1, 7.2.2, 7.4.7	M
SMPP_DG_002	Datagram reception (binary encoded)	<i>data_sm</i> , <i>data_sm_resp</i> and <i>generic_nack</i> PDUs	7.2.1, 7.2.2, 7.4.6	M
SMPP_DG_003	WCMP transmission to WAP Proxy Server	<i>payload_type</i> parameter in <i>data_sm</i> PDU	7.1.6, 7.4.7.1	O
SMPP_DG_004	WCMP reception from WAP Proxy Server	<i>payload_type</i> parameter in <i>data_sm</i> PDU	7.1.6, 7.4.6.1	O
SMPP_DG_005	Bind Transceiver	<i>bind_transceiver</i> , <i>bind_transceive_resp</i> PDUs	7.2.3.1, 7.4.1	M (note 1)
SMPP_DG_006	Bind Transmitter & Bind Receiver	<i>bind_transmitter</i> , <i>bind_transmitter_resp</i> , <i>bind_receiver</i> , <i>bind_receiver_resp</i> PDUs	0, 7.2.3.3, 7.4.2, 7.4.3	M (note 1)
SMPP_DG_007	Unbind	<i>unbind</i> and <i>unbind_resp</i> PDUs	7.4.4	M
SMPP_DG_008	Enquire Link	<i>enquire_link</i> and <i>enquire_link_resp</i> PDUs	7.3.1	O
SMPP_DG_009	Text based encoding of WDP and WCMP messages	<i>data_coding</i> parameter in <i>data_sm</i>	7.1.4, 7.4.7.1, 7.4.6.1	O
SMPP_DG_010	More messages to send	<i>more_msgs_to_send</i> parameter in <i>data_sm</i>	7.1.2, 7.4.6.1	O
SMPP_DG_011	Store and forward mode	<i>esm_class</i> parameter (“store and forward”) in <i>data_sm</i>	7.2.1, 7.4.6.1	O
SMPP_DG_012	Datagram mode (no secure storage)	<i>esm_class</i> parameter (“datagram”) in <i>data_sm</i>	7.2.1, 7.4.6.1	M
SMPP_DG_013	Segmentation and re-assembly	SAR parameters in <i>data_sm</i>	7.1.5, 7.4.6.1, 7.4.7.1	O

Identifier	Function	PDU / Capability	Reference	Mandatory/ Optional
SMPP_DG_014	Generate SMSC Delivery Reports	<i>registered_delivery</i> parameter in <i>data_sm</i> (request in original message).  <i>esm_class</i> , <i>receipted_message_id</i> and <i>message state</i> parameters in <i>data_sm</i> PDU (for Delivery Receipt message).	7.4.6.1  7.4.7.1	O
SMPP_DG_015	(blank)			
SMPP_DG_016	processing of network type for peer wireless device	<i>dest_network_type</i> , <i>source_network_type</i> parameters in <i>data_sm</i>	7.4.6.1, 7.4.7.1	O
SMPP_DG_017	processing of bearer type for peer wireless device	<i>dest_bearer_type</i> , <i>source_bearer_type</i> parameters in <i>data_sm</i>	7.4.6.1 7.4.7.1	O
SMPP_DG_018	processing of validity period on a per message basis	<i>qos_time_to_live</i> parameter in <i>data_sm</i>	7.4.6.1	O
SMPP_PS_019	DPF setting and generation of Alert Notifications	<i>alert_notification</i> PDU and <i>set_dpf</i> parameter in <i>data_sm</i> PDU	7.1.7, 7.3.2, 7.4.6.1, 7.4.9	<u>O</u>

**Notes**

1. Only one of these Functional Units need be implemented (see section 7.2.3).

---

## Appendix B. History and Contact Information

<b>Document history</b>		
<b>Date</b>	<b>Status</b>	<b>Comment</b>
23-July-1999	Draft	First Version
27-July-1999	Draft	Added SCR in Appendix . John Murtagh (johnm@aldiscon.ie)
29-July-1999	Draft	Updates following review in WAP Message Centre Protocol DC teleconference (28 <sup>th</sup> July 1999). John Murtagh (johnm@aldiscon.ie)
03-August-1999	Initial Release v1.0	Additional updates following review in WAP Message Centre Protocol DC teleconference (28 <sup>th</sup> July 1999). John Doyle (johnd@aldiscon.ie)
<b>05-November-1999</b>	<b>Proposed</b>	WDP WCMP WDG Adapt 9-Sept-1999. Inclusion of "interface_version" parameter in BIND_TRANSMITTER and BIND_RECEIVER. Changes made to sections 7.4.2.1, 7.4.2.2, 7.4.3.1 and 7.4.3.2 WDPWCMPAdapt 22-Oct-1999. Inclusion of "interface_version" parameter in BIND_TRANSCEIVER to reflect similar correction made in SMPP 3.4 (Issue 1.2). Changes made to sections 3.4 and 7.4.1.1
<b>Contact Information</b>		
<a href="http://www.wapforum.org/">http://www.wapforum.org/</a> <a href="mailto:technical-comments@wapforum.org">technical-comments@wapforum.org</a>		